


### DEFINITION APPLICATIONS



Plydeck is the ventilated decorative flooring system that can be used on terraces, walkways, residential or commercial gardens and gives a wood finish, but with the strength and durability of concrete. Consult the technical data sheets of the Plydeck pieces at [www.plycem.com](http://www.plycem.com)



### STORAGE AND HANDLING



- Plydeck should be transported on a firm, flat pallet with waterproof wrap.
- Plydeck should be kept covered and dry, stored on clean pallets on the ground.
- Each package or piece of Plydeck should be handled horizontally by two people. Protect edges and corners to prevent breakage. Transport Plycem Plydeck boards by the center of their narrow edge.

### FASTENINGS



Plastic Clip (for wood or metal)



Starter clip

### TOOLS



Drill



Measuring tape



Hammer



Level



Circular saw with diamond blade




Square tip No.1 x 50 mm (clip on metal). Square tip No.2x50 mm (clip on wood).

### INSTRUCTIONS




Plydeck Plycem can be installed on metal joists, with a maximum spacing of 406 mm o.c. It can also be installed on treated and dry wood structures.

Note: Make sure that the Plydeck pieces are always fastened on at least two sections (3 supports). Do not fasten sections of Plydeck on two supports only.



### INSTALLATION OF THE CLIPS

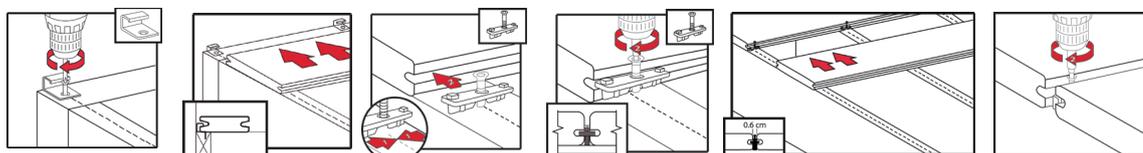

**NOTE:** Plydeck is an application for residential and commercial use. If used in public areas, use a maximum beam spacing of 30.5 cm at floors, access and stairs.

### PAINTING, INKING AND SEALING



You can paint the deck with color or stain it to give it a wood finish. Use weather-resistant flooring paints or dyes for fiber cement. Always follow the manufacturer's instructions. It is suggested to apply two coats with a sponge or cloth in the case of dye. The paint can be applied with a roller.

**Note:**

**Before installing them, seal the back side and edges before installing. Always make sure there is ventilation under the deck specially if the deck is going to be installed less than 30 cm from the ground.**

**APPLYING THE DYE:**

- **STEP 1 (Before installation)**  
First, pour the dye on a sponge or cloth. Remove any dust from the Plydeck piece.
- **STEP 2:** Apply a first coat of dye with the sponge or cloth along the surface of the Plydeck piece, always passing the dye in the same direction.
- **STEP 3:** Apply the dye on all sides of the Plydeck piece.
- **STEP 4 (already installed):** Once the deck is installed, proceed to apply a second coat of dye to the entire surface. This can be once the deck is installed. In case of painting, apply one coat on the entire surface and edges of the piece of Plydeck. Later, apply the second coat when it is installed.
- **STEP 5 (already installed):** Place the pieces of Plydeck one by one. Once the application is complete, impregnate again the sponge or cloth and cover the surface with a second coat of dye.
- **STEP 6:** A clear sealant for outdoor floors must be always applied on the entire exposed surface. Ask the Technical Department in each country about it.

### MAINTENANCE



Periodically provide adequate maintenance to the deck and all its components

- Remove leaves or particles on the floor. If it is dirty, wash it with water and soap.
- Once a year, check the condition of the finishing sealant, and protect it again if it is required.